


14 Gauge
Galvanized
Steel

All Welded,
Ground and Finished
for Smooth Sealing
Surface.

Accommodates 5.88"
(149 mm) or 11.50"
(292 mm) Deep
Filters and Prefilter
Assembly.

Tapered Swing Bolt
Receptacle Guides
and Positions Filter
for Perfect Alignment
and Seal.

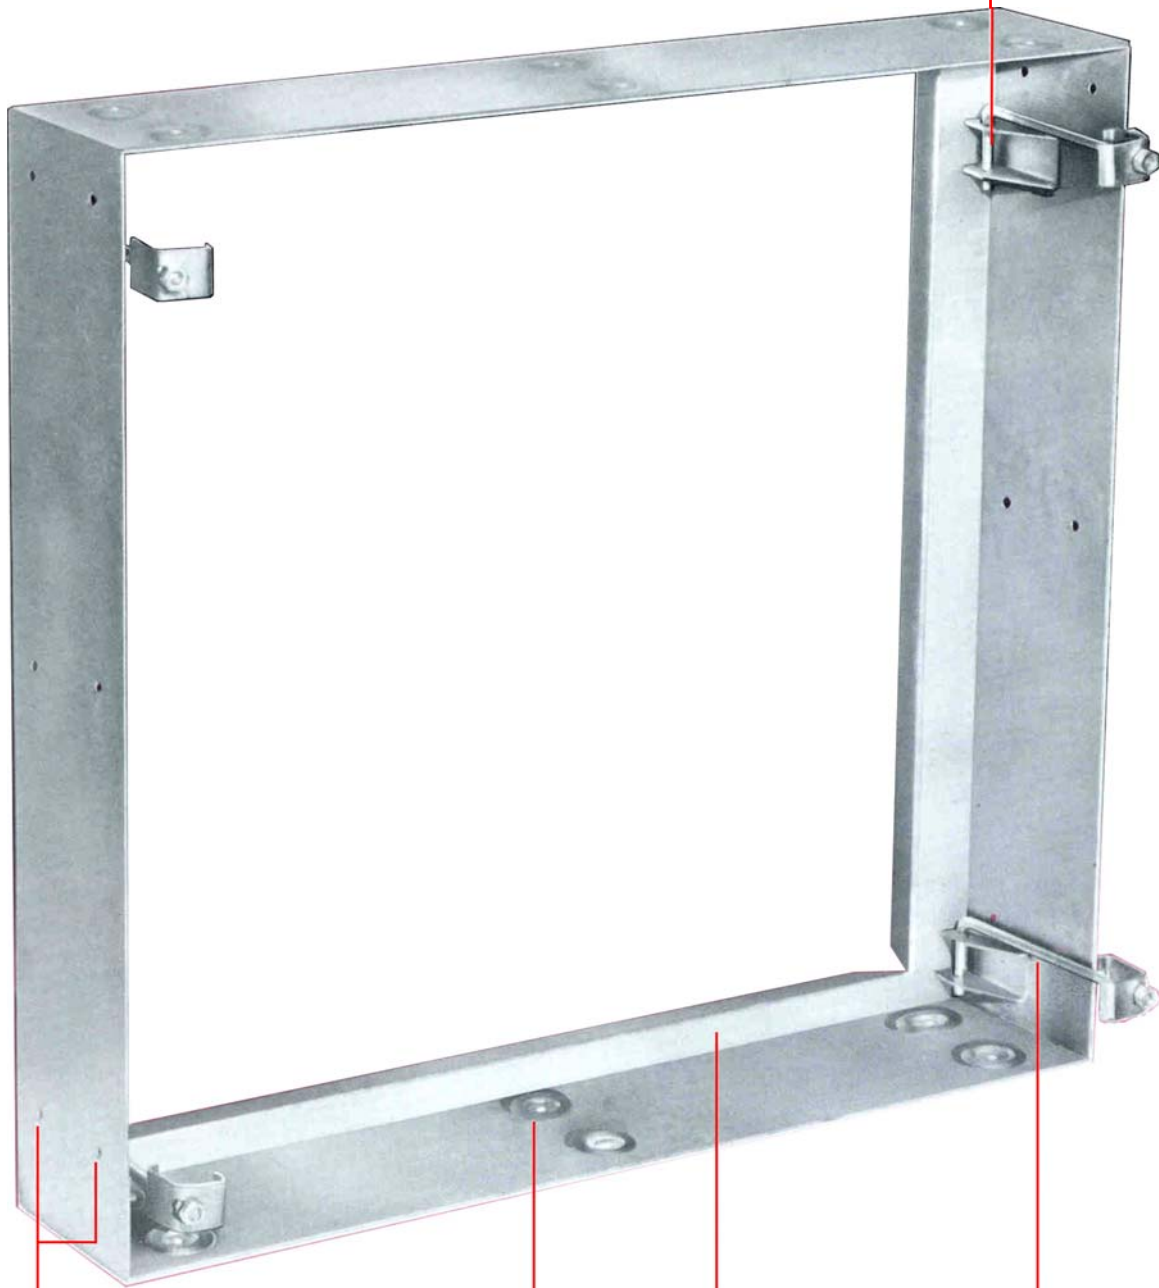

Pre-Punched Holes
Facilitate Precise and
Rugged Assembly of
Banks.

Annular Based,
Inverted Dimples
Around Mounting
Holes Provide
Accurate Filter
Spacing and Bolt/Nut
Clearance.

Sealing Surface
Reinforcing Flange
Precludes Surface
Deflection.

Swing Bolt
Assemblies
Reliably Seal
Filter to
Leak-Proof
Specifications.

Distributed by:



FLORENCE FILTER CORPORATION

"Over 35 Years of Filter Excellence"

www.florencefilter.com

530 W. Manville ♦ Compton ♦ California 90220
(310) 637-1137 ♦ FAX (310) 631-4323 ♦ Out Of State (800) 776-2021

1/31/05
P304