
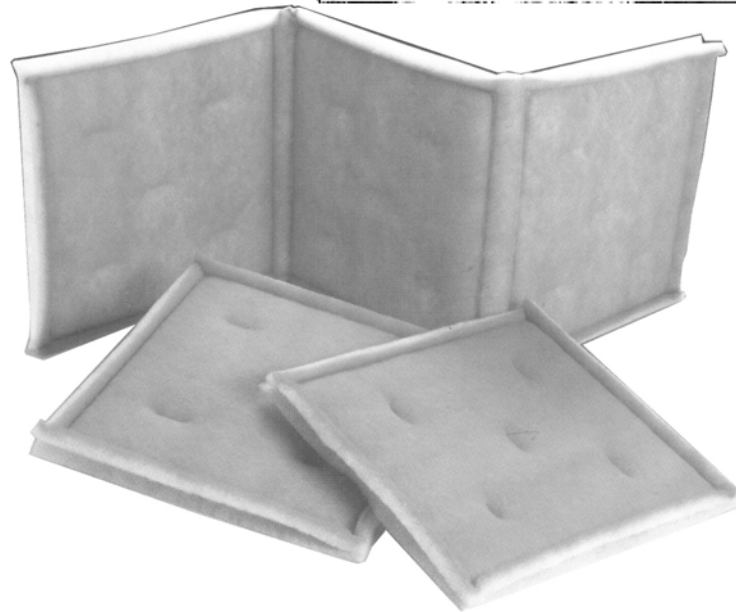
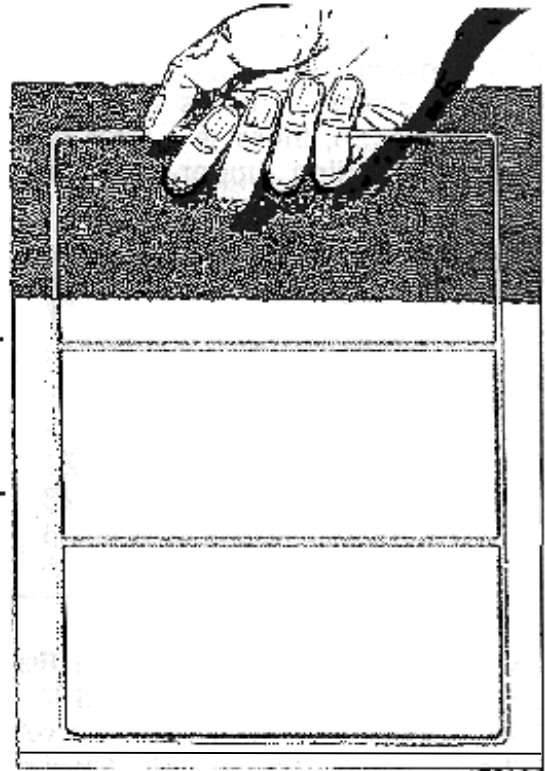


Carbon Flo-Panels Carbon Flo-Links and Carbon Flo- Sleeves Self-Gasketing Filters

Application: To control odor, vapor, smoke, gases and chemical fumes

1/8-inch
carbon
saturated
polyester
media for
odor
adsorption

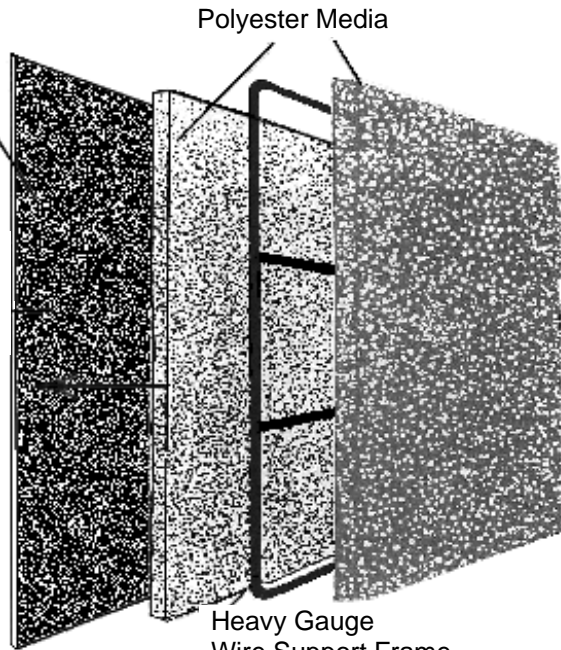

FLORENCE FILTER CORPORATION
530 West Manville Street ♦ Compton, CA 90220
Phone: (310) 637-1137 ♦ FAX (310) 631-4323
Outside California: (800) 776-2021 www.florencefilter.com

Special Features:

1. Flo-Panels are internally supported filters made by heat sealing or sewing layers of resin bonded polyester media over an internal steel frame. A generous overcut of media around the filter's perimeter makes it self sealing. The Carbon Flo-Panel is unique in its combination of poly media and a polyester media that is saturated with a carbon sludge.
2. Tough construction will allow rough handling of filter.
3. Flo-Panels require no clips or holding devices because of their snug fit.
4. Flo-Panel is self-gasketing, because filtering media serves as a gasket and totally eliminates air by-pass.
5. Flo-Panels have no dangerous cutting edges unlike conventional disposable filters.
6. Weather exposure will not damage Flo-Panels as bonding resin in synthetic media is not water soluble.
7. Available as a Poly B Flo-Panel with carbon or a Poly B Flo-Panel with an FT20 strainer and carbon.
8. All filter panels are packaged 20 per box.
9. Packaging of links may vary depending on length of link.

Performance Data

Media Designation	Panel B w/Carbon
Thickness (actual)	1"
Weight (oz/sq. ft.)	1½
Type of Material	poly & carbon
Construction	1 Poly B 1 Poly B w/carbon saturated Poly
Color	white + grey
Adhesive (grams) (if used)	None Recommended
Resistance (inch w.g.) ASHRAE Standard 52-1	
Initial inch w.g. (350 fpm)	.61
Final inch w.g. (350 fpm)	1.25
Efficiencies:	
1 micron particles	33%
5 micron particles	66%
10 micron particles	85%
Humidity Resistance	100%
Dust Holding Capacity (grams/sq. ft.)	190
Temperature Rating	250°F



FLORENCE FILTER CORPORATION

530 West Manville Street ♦ Compton, California 90220
 Phone: (310) 637-1137 ♦ Fax (310) 631-4323 ♦ Outside California: (800) 776-2021
www.florencefilter.com ♦ sales@florencefilter.com